
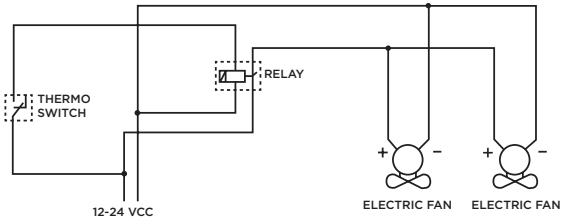
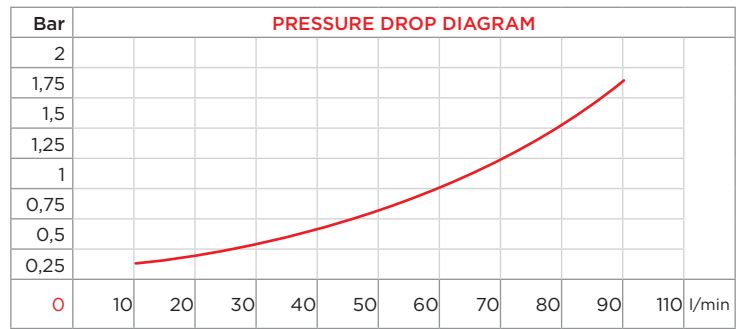


### PURCHASE CODES

APL 2/463 12/24V without thermo switch	3RL2/46312 / 3RL2/46324
APL 2/463 12/24V with thermo switch	3RL2/46312T247 / 3RL2/46324T247 3RL2/46312T260 / 3RL2/46324T260

### SPARE PARTS


Thermo-switch 60-49 IP 65	1TRM60-49
Thermo-switch 47-36 IP 65	1TRM47-36
Electric junction box	1CSSDBOPLA
12VDC Relay	1RLCOPAT12
24VDC Relay	1RLCOPAT
Shock isolating mounting (4 pcs)	3KIT4135
Cooling element	1RO01341
Frame	3CNL2/463.1
12VDC Electric fan	1VNAPL43012C
24VDC Electric fan	1VNAPL43024C

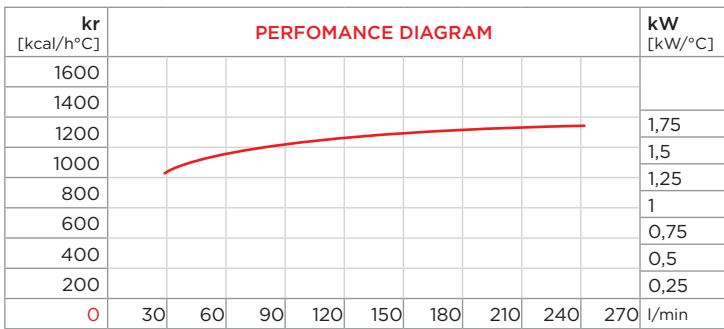

**CORRECTION FACTOR**

cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

- Dimensions and technical characteristics are not binding

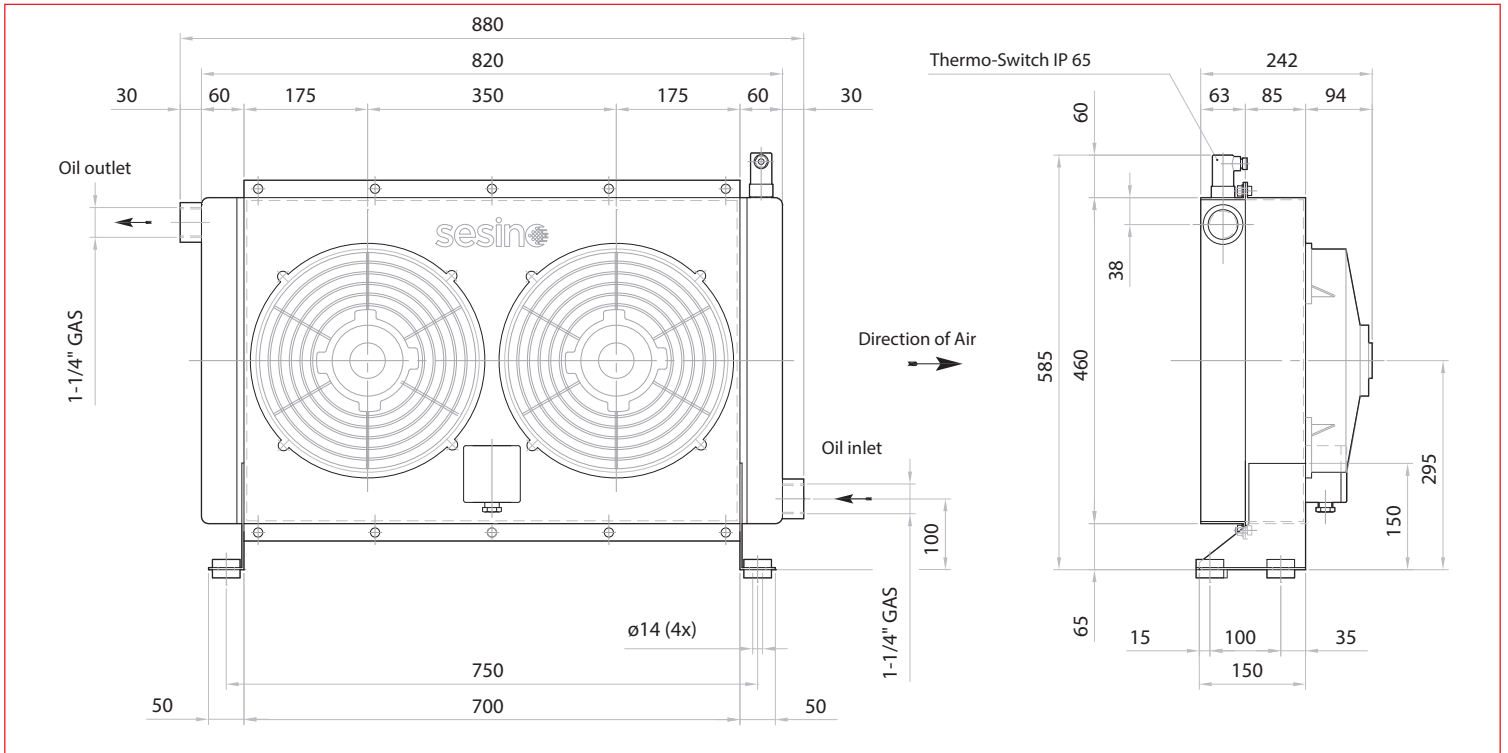

OIL FLOW	VOLTAGE	POWER	CURRENT	AIR FLOW	ELECTRIC PROTECTION	NOISE LEVEL	WEIGHT	CAPACITY	Ø FAN
l/min	V	W	A	m <sup>3</sup> /h	IP	dB(A)	kg	lt.	mm
30-240	12	420	34	4.800	68	85	40	8	310
30-240	24	420	17	4.800	68	85	40	8	310